

Platinum *plus*

RF Communication Card

(P/N: C-PP-RF)

Follow this step by step guide in order to install your new Rotem RF Card.




! DANGER !

Disconnect the Platinum plus from any power supply while Replacing a card. Not doing so may result in personal injury or death

1. Connect card to its socket in the Platinum plus. The second slot from the right hand side of the controller (slot P7 written on the PCB). Written on the RF card are the RX/TX/COM connections. Connect them like a regular RCLP card.

P+
Connection



2. Drill a hole on the right hand side of the controller, make sure the hole fits the size of the supplied nut.
3. Fit the black wire through the hole, connect to RF card and tighten nut to the Platinum Plus. Secure nut connected to the RF card (make sure you leave enough slack).



Approvals

- ✓ The 230 VAC has a CE approval : EN61000-3-3; EN61000-6-2; CISPR 11 GROUP 1 CLASS A
- ✓ FCC Part 15 Subpart B

Platinum *plus*

RF Communication Card

(P/N: C-PP-RF)


Follow this step by step guide in order to install your new Rotem RF Card.



Disconnect the Platinum plus from any power supply while Replacing a card. Not doing so may result in personal injury or death

1. Connect card to its socket in the Platinum plus. The second slot from the right hand side of the controller (slot P7 written on the PCB). Written on the RF card are the RX/TX/COM connections. Connect them like a regular RCLP card.

P+
Connection




2. Drill a hole on the right hand side of the controller, make sure the hole fits the size of the supplied nut.
3. Fit the black wire through the hole, connect to RF card and tighten nut to the Platinum Plus. Secure nut connected to the RF card (make sure you leave enough slack).



Approvals

- ✓ The 230 VAC has a CE approval : EN61000-3-3; EN61000-6-2; CISPR 11 GROUP 1 CLASS A
- ✓ FCC Part 15 Subpart B


4. Take the antenna and its stand and place on high place where nothing is blocking the LOS (line of sight).
5. Secure the stand using two screws (supplied), release the nut and bolt on the end of the antenna. Place the antenna through the hole on top of the stand and secure the nut and bolt on the opposite side.

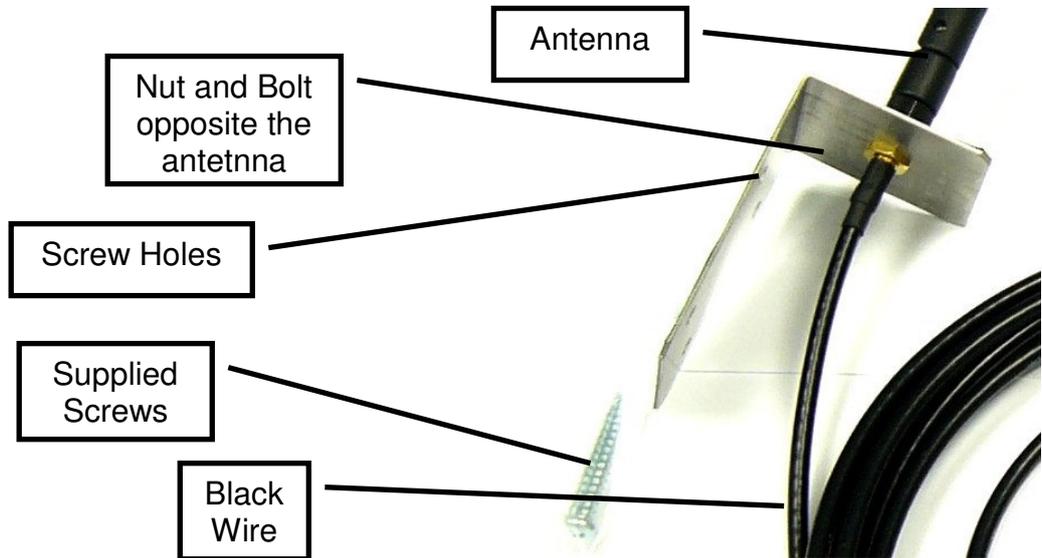

6. Connect the end of the black wire to the antenna,



4. Take the antenna and its stand and place on high place where nothing is blocking the LOS (line of sight).
5. Secure the stand using two screws (supplied), release the nut and bolt on the end of the antenna. Place the antenna through the hole on top of the stand and secure the nut and bolt on the opposite side.

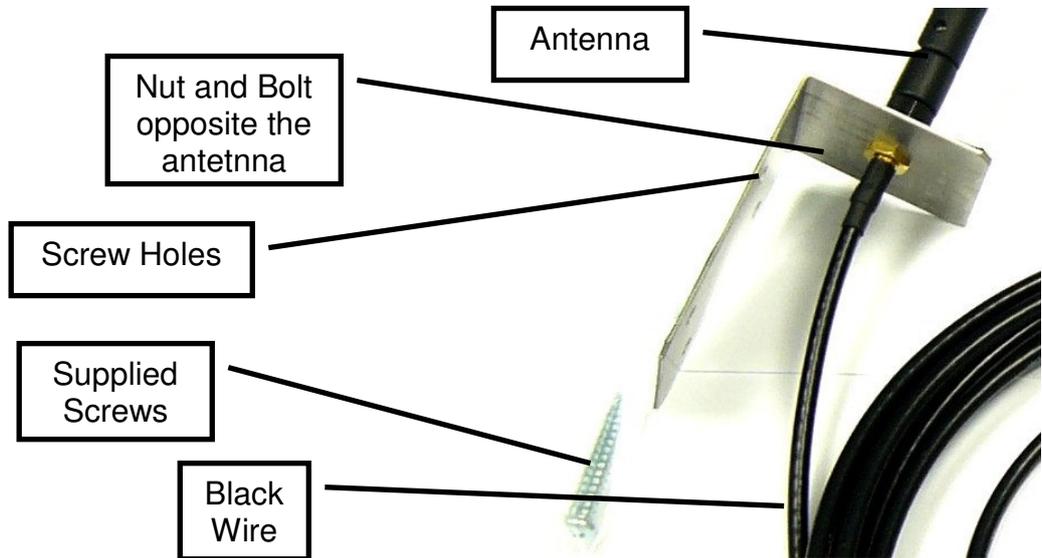

6. Connect the end of the black wire to the antenna,

